

OptiFlo® RC

Pulse-Jet Cylindrical
Cartridge Dust Collector

| Leading the Way in Dry Dust Collection Technology

OptiFlo® RC

POWERED BY

POWERED BY
REDClean™ Media



BETTER AIR IS OUR BUSINESS®



REDFiltration™

Reliable Efficient Durable™

Reliable Efficient Durable™

Dependable.

High Quality.

Ease of Maintenance.

Cost Effective.


Optimal Productivity.

Least Environmental Impact.

Long Lasting.

Tough.

Resistant to Elements.

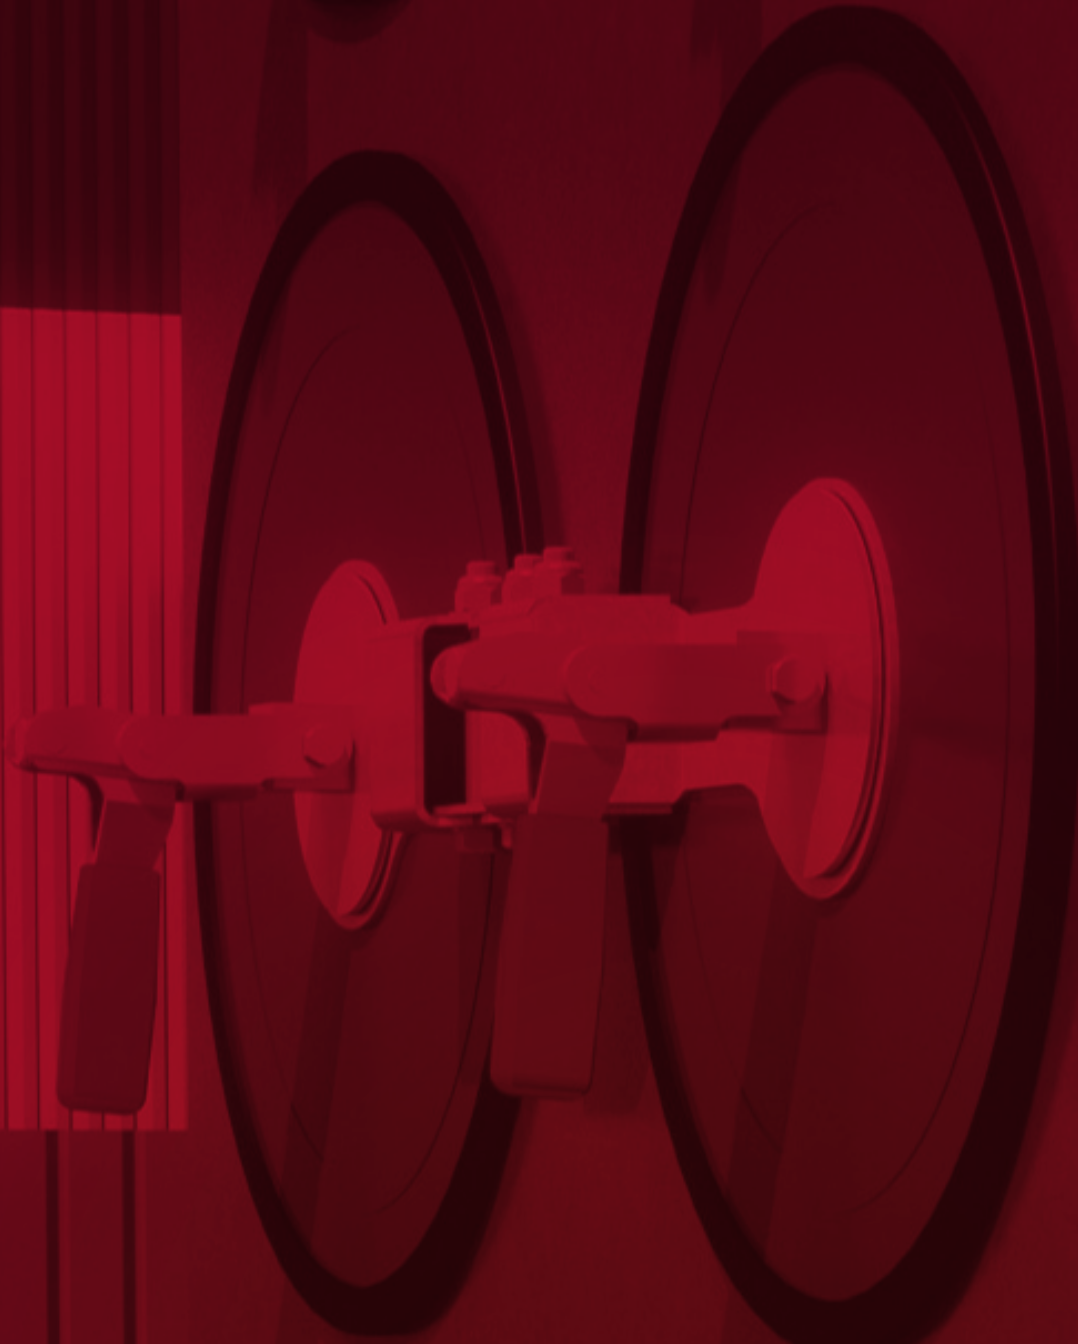

AAF®
INTERNATIONAL
REDFiltration™



The Evolution of REDFiltration™


For more than 90 years, AAF International has been providing filtration solutions for industrial processes around the world.

Throughout our rich history, AAF International has pioneered many of the techniques used today to control airborne dust, fume and vapor in virtually every production process. Our constant passion for innovative solutions has led us to offer the most reliable, efficient and durable products available on the market today.

AAF International, a member of DAIKIN Group, also believes in valuing our people, communities and environment. Our ISO 9001 certified facilities utilize lean and green manufacturing to deliver products with short lead times and minimal environmental impact. Our people centered management philosophy enables us to deliver the best customer service and also give back to the communities in which we serve and live.

Trust the Power of RED



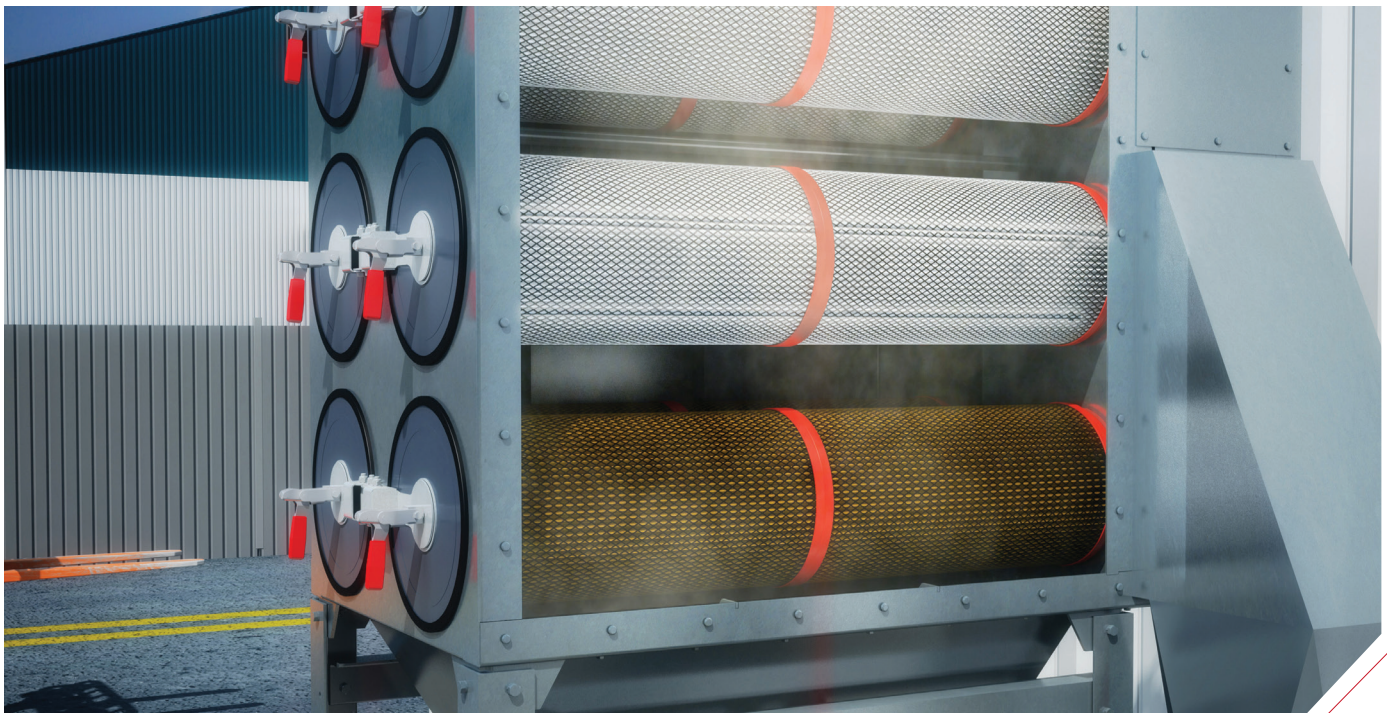

The OptiFlo® RC Advantage

The AAF OptiFlo® RC cartridge collector is the optimum solution for most types of dry dust collection needs and is ideal for moderate to light dust loading applications. The OptiFlo® RC combines desired functionality and product design to deliver improved performance at a lower cost of ownership.

Benefits and Features

- Compact modular design for small footprint requirements
- Slim line inlet reduces turbulence, which minimizes cartridge and media abrasion
- Active mandrel design aids the pulse cleaning near the tube sheet to extend filter life
- Adjustable quick access latch and hinged door greatly reduces cartridge change-out time
- Designed to meet NFPA and ATEX regulations for combustible dust hazards
- Improved pulse performance to reduce compressed air usage
- Utilization of industry leading REDClean™ nano cartridge media

OptiFlo® RC is ideal for eliminating troubles related to

- Cartridge blinding
- Dust bridging
- Dirty air bypass
- Poor door sealing





Typical Applications

Industrial Processes

- Plastic and rubber (moulding and grinding)
- Rock and related products
- Coal dust
- Powder paint
- Tobacco

Chemical

- Plastics and rubber
- Inorganic chemicals
- Pesticides/fertilizer
- Paint pigments

Food Processing

- Cereals
- Confectionery
- Flour and mixes
- Dog and cat food
- Seasonings & additives
- Dairy
- Starch

Metalworking


- Abrasive cleaning/sandblasting
- Grinding/polishing
- Laser cutting
- Metallizing/thermal spray (arc, plasma and flame spray, HVOF)
- Weld fume
- Battery manufacturing

Pharmaceutical

- Tablet coating
- Tablet presses
- Material handling
- Packaging

Woodworking

- Furniture manufacturing
- Cabinetry

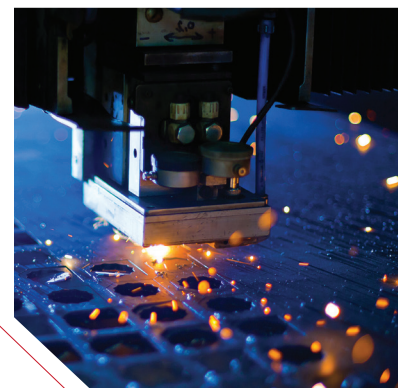

Please speak to your AAF representative if you have a specific application requirement.

Available Options and Accessories

Available Options

- Explosion vents
- Sprinkler system
- Alternate cartridge media
- 72"/1,829 mm hopper clearance
- 24"/610 mm hopper clearance (on specific sizes)
- Solenoid heaters
- Hopper discharge devices
- Hopper transitions
- Access platform and ladder
- Compressed air regulator
- Abrasive dust inlets
- Side mounted fan (on specific sizes)
- High-temperature construction
- 2, 3, 4, 5 cartridge-high units
- Bin vent
- Cartridge and bin bag in/bag out
- REDClean™ D wide and REDClean™ SA wide
- Slide gate

Available Accessories

- Explosion protection equipment
- Fan with damper
- Fan silencer
- Airlocks
- Screw conveyers
- Control panel
- Custom paint systems
- Stainless steel construction
- HEPA/ASHRAE filters and housings

OptiFlo® Available Media

- REDClean™ D Media
- REDClean™ DFR Media
- REDClean™ D (180 pleats)
- REDClean™ N Media
- REDClean™ NFR Media
- REDClean™ M
- REDClean™ MHT
- REDClean™ S
- REDClean™ S ALUM
- REDClean™ S PTFE
- REDClean™ SA
- REDClean™ SA (180 pleats)

Reduce Your Operating Costs

The improved OptiFlo® RC design, combined with optimized REDClean™ nano cartridges, delivers improved air cleaning while reducing the overall cost of operation*.

- The improved pulsation configuration and the newly designed active mandrel deliver better cartridge cleaning, thus increasing the life of the cartridges.
- The optimized REDClean™ cartridges are designed to increase the usable filter area, which reduces the differential pressure across the filters and allows for better dust rejection during pulsing.
- The hinged quick seal doors decrease the time required for cartridge change-outs, resulting in reduced maintenance time.


*Total cost of ownership = capital costs + operational costs + maintenance costs



Dimensions and Specifications

The compact modular design of the AAF OptiFlo® RC makes it ideally suited for the modern workplace, offering total flexibility for the variable nature of global demand.

Typical Configurations

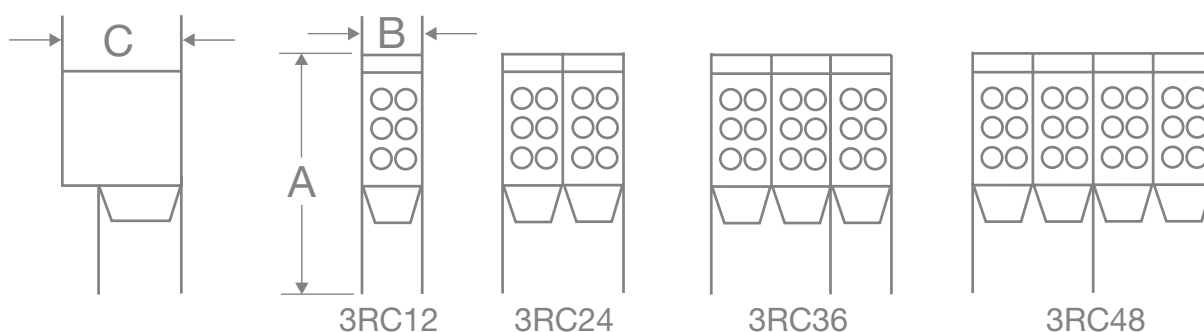

Model	Number of Modules	Number of Cartridges	REDClean™ N Filter Area		Height (A)		Width (B)		Depth (C)		Approx. Weight	
			sq ft	sq m	in	mm	in	mm	in	mm	lb	kg
2RC4	1	4	908	84.4	144-13/16	3,654	40-1/4	1,022	54- 5/8	1,387	1,662	754
2RC8	1	8	1,816	168.7	144-13/16	3,654	40-1/4	1,022	82-7/8	2,105	1,763	800
2RC16	2	16	3,632	337.4	144-13/16	3,654	80-1/4	2,038	82-7/8	2,105	2,565	1,163
2RC24	3	24	5,448	506.1	144-13/16	3,654	120-1/4	3,054	82-7/8	2,105	4,320	1,960
2RC32	3	32	7,264	674.8	144-13/16	4,099	160-1/4	4,070	82-7/8	2,105	4,567	2,072
3RC6	1	6	1,362	126.5	163-1/2	4,099	40-1/4	1,022	54-5/8	1,387	1,999	907
3RC12	1	12	2,724	253.1	163-1/2	4,099	40-1/4	1,022	82-7/8	2,105	2,103	954
3RC24	1	24	5,448	506.1	163-1/2	4,152.9	80-1/4	2,038	82-7/8	2,105	3,123	1,417
3RC36	3	36	8,172	759.2	163-1/2	4,099	120-1/4	3,054	82-7/8	2,105	4,205	1,907
3RC48	4	48	10,896	1,012.2	163-1/2	4,099	160-1/4	4,070	82-7/8	2,105	5,587	2,534
4RC16	1	16	3,632	337.4	181-7/8	4,620	40-1/4	1,022	82-7/8	2,105	2,352	1,067
4RC32	2	32	7,264	674.8	181-7/8	4,620	80-1/4	2,038	82-7/8	2,105	3,683	1,671
4RC48	3	48	10,896	1,012.2	181-7/8	4,620	120-1/4	3,054	82-7/8	2,105	4,966	2,253
4RC64	4	64	14,528	1,349.7	181-7/8	4,620	160-1/4	4,070	82-7/8	2,105	6,564	2,977
4RC80	5	80	18,160	1,687.1	181-7/8	4,620	201-1/4	5,112	82-7/8	2,105	8,648	3,923
4RC96	6	96	21,792	2,024.5	181-7/8	4,620	241-1/4	6,128	82-7/8	2,105	10,246	4,648
4RC112	7	112	25,424	2,361.9	181-7/8	4,620	281-1/4	7,144	82-7/8	2,105	11,529	5,230
4RC128	8	128	29,056	2,699.3	181-7/8	4,620	322-1/4	8,185	82-7/8	2,105	19,810	8,986
5RC20	1	20	4,540	421.8	200-3/8	5,090	40-1/4	1,022	82-7/8	2,105	2,721	1,234
5RC40	2	40	9,080	843.5	200-3/8	5,090	80-1/4	2,038	82-7/8	2,105	5,690	2,581
5RC60	3	60	13,620	1,265.3	200-3/8	5,090	120-1/4	3,054	82-7/8	2,105	8,480	3,847
5RC80	4	80	18,160	1,687.1	200-3/8	5,090	160-1/4	4,070	82-7/8	2,105	11,334	5,141
5RC100	5	100	22,700	2,108.8	200-3/8	5,090	201-1/4	5,112	82-7/8	2,105	14,170	6,428
5RC120	6	120	27,240	2,530.6	200-3/8	5,090	241-1/4	6,128	82-7/8	2,105	17,024	7,722
5RC140	7	140	31,780	2,952.4	200-3/8	5,090	281-1/4	7,144	82-7/8	2,105	19,813	8,987
5RC160	8	160	36,320	3,374.1	200-3/8	5,090	322-1/4	8,185	82-7/8	2,105	22,668	10,282
5RC180	9	180	40,860	3,795.9	200-3/8	5,090	362-1/4	9,201	82-7/8	2,105	25,388	11,516

NOTES

1. Weight does not include any accessories such as fans or controls.
2. See AAF sales drawings for complete dimensions.
3. The width dimension is from panel to panel, not including any protruding legs or hardware.
4. Depth is front panel to back of mainframe, it does not include the door latch or any hardware.
5. Shipping weights include filter cartridges.
6. Height based on 48"/1,219 mm hopper clearance.
7. Filter area varies with cartridge type.

Reliable, Efficient, Durable

Sales Offices:

Europe, Middle East & Africa

AAF Ltd

Bassington Lane, Cramlington
Northumberland, NE23 8AF UK
Tel: +44 1670 713 477
Email: redfiltration@aafintl.com

AAF, S.A.

C/ Urartea, 11
Polígono Ali-Gobeo
01010 Vitoria, Spain
Tel: +34 945 214851
Email: redfiltration@aafintl.com

AAF France

Rue William Dian
27620 Gasny, France
Tel: +33 2 32 53 60 60
Email: redfiltration@aafintl.com

AAF Sri

Via Lario, 1
22070 – Fenegrò (CO), Italy
Tel: +39 031 35 25 311
Email: redfiltration@aafintl.com

AAF Luftreinigungssysteme GesmbH

Campus 21
Europaring F12 401
2345 Brunn am Gebirge, Austria
Tel: +43 (0) 2236 677 628 0
Email: redfiltration@aafintl.com

AAF – Lufttechnik GmbH

Centroalle 263 b
D 46047
Oberhausen, Germany
Tel: +49 208 828423 0
Email: redfiltration@aafintl.com

AAF – Environmental Control Epe

1, Ifaistou & Kikladon
15354- Gлика Nera, Greece
Tel: +30 2106632015
Email: redfiltration@aafintl.com

AAF Hava Filtreleri ve Ticaret AS

Hürriyet Mahallesi
Yakacık D-100 Kuzey Yan Yolu No: 49/1-2
34876 Kartal, Istanbul, Turkey
Tel: +90 216 4495164/65
Email: redfiltration@aafintl.com

AAF International – Middle East

FZS1BC01-BC04, Jebel Ali Dubai, UAE
Tel: 009714 8894886
Email: redfiltration@aafintl.com

AAF Saudi Arabia Ltd.

P.O. Box 59336 Riyadh 11525,
Kingdom of Saudi Arabia
Tel: +966 1 265 0883
Email: redfiltration@aafintl.com

Asia

America Air Filter Manufacturing Sdn Bhd

(Asia Regional Office)
Lot 6, Jalan Pengapit, 15/19,
Seksyen 15, 40000 Shah Alam,
Selangor Darul Ehsan, Malaysia
Tel: +603 5039 7733
Email: redfiltration@aafintl.com

AAF (Wuhan) Co. Ltd., (China HQ)

33 Che Cheng Road
Wuhan Economic & Technological
Development Zone
Wuhan, Hubei Province PR,
China 430056
Tel: +86 27 8447 3671 +86 27 8447 3672
Email: redfiltration@aafintl.com

AAF International (Thailand) Co., Ltd.

100 Moo 4 Soi Namdang – Bangplee 44
Bangkaew Bangplee, Samutprakarn
10540, Thailand
Tel: +66 2738 7788
Email: redfiltration@aafintl.com

Daikin Australia Pty Ltd

(AAF Australia & New Zealand Sales Office)
15 Nyadale Road Scoresby Victoria 3179,
Australia
Tel: +61 (0)3 9237 5562
Email: redfiltration@aafintl.com

North & South America

AAF International

9920 Corporate Campus Drive, Suite 2200
Louisville, KY 40223-5000, USA
Tel: 1 502 637 0011
Toll Free: 1 800 477 1214
Email: redfiltration@aafintl.com

AAF, S de RL de CV

Av. Primero de Mayo No. 85,
Col. San Andrés Atenco,
C.P. 54040 Tlalnepantla Edo.
De Mexico, México
Tel: +52 55 5565 5200
Email: redfiltration@aafintl.com

American Air Filter Brasil Ltda.

Rua Doutor Bacelar, 173-CJ. 121
Vila Clementino – São Paulo – Brazil
CEP 04026-000
Tel: +55 11 5567 3000
Email: redfiltration@aafintl.com

The information in this document is the property of AAF® International and may not be copied or distributed to any third party, or used for any purpose other than that for which it is supplied, without the express written consent of AAFCI.

While the information herein is provided in good faith based on information available when the document was created, it should not be relied upon as being complete or accurate, and the products advertised within this document, and their components and accessories, are subject to change without notice. AAFCI provides this information on an AS IS basis and makes no warranties, expressed or implied, or representations regarding same. This document does not establish, and should not be taken as establishing, any contractual or other commitment binding upon AAFCI or any of its subsidiaries or associated companies.



BETTER AIR IS OUR BUSINESS™



RED Filtration™

Reliable Efficient Durable™